


F60 Flail Cutting Deck

Built for the Groundsmaster 3000 Series

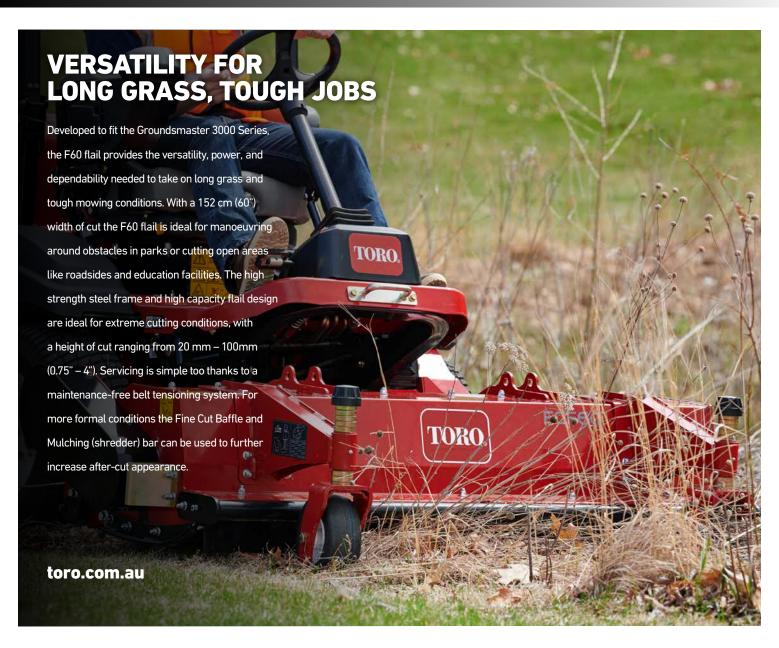

FEATURES

Power & Durability

- Power Take Off (PTO) drive generates more efficient power transfer and reduces engine power consumption
- 100 mm (4") diameter inherently balanced flail rotor reduces vibration
- High strength, low weight steel frame provides strength and durability without additional weight

Productivity

- · Maintenance-free belt tensioning
- · Simplified maintenance and servicing

Performance

- \bullet Proven Tempest $^{\text{TM}}$ 'paddle-type' flail blades.
- Full width rear roller for striped finish and anti-scalping
- Height of cut range from 20mm (0.75") to 100mm (4")

Optional Accessories

- Fine Cut Baffle Kit (134-4195)
- Mulching (Shredder) Bar (134-4194)
- Back-to-Back Flail Blades (134-4198) x2 required per flail

F60 FLAIL CUTTING DECK SPECIFICATIONS*

152 CM (60") 'F60' FLAIL CUTTING DECK, MODEL 02835

FRAME CONSTRUCTION	Welded, high strength, low weight steel frame body
ROTOR CONSTRUCTION	100mm (4") Diameter, dynamically balanced flail rotor. Greaseable self-aligning roller bearings mounted in rigid mounted bearing housings. Rotor can be removed from frame without prior removal of bearings and bearing housings.
HEIGHT OF CUT	20mm (0.75") - 100mm (4")
MOWING RATE**	Up to 1.7 hectares (4.2 Acres) per hour
BLADES	32x TEMPEST™ 'Paddle-type' Flail Blades
BLADE TIP SPEED	2,900rpm, 46.5m/s (152.4ft/sec) tip speed
BELT IDLER	Mechanical adjustable Idler
DECK SKID	Replaceable, bolt-on steel skids
CASTOR WHEELS	8 x 3.50-4 4-Ply, pneumatic, sealed precision ball bearings.
LIFT ARMS	Independent lift arms and hydraulic weight transfer provide deck floatation. Supplied completed with the flail
WEIGHT	256kg (564lbs)
OPTIONAL ACCESSORIES	Fine Cut Baffle Kit Mulching Bar Back to Back Flail Blades Replacement blade kits, choice of 2x Blades or 16x blades (2x per flail required)
FITMENT	Fits Groundsmaster 3200 (2WD/4WD; not suitable with heater-only cab, additional weight kit required), Groundsmaster 3300, Groundsmaster 3310

^{**}Assumes 11.3 km/h (7 mph) mow speed, no overlap and 100% efficiency.



^{*} Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. We reserve the right to improve our products and make changes in specifications, designs, and standard equipment without notice and without incurring obligation. The gross horsepower of this engine have been laboratory rated by the engine manufacturer. As configured to meet safety, emission and operating requirements, the actual engine horsepower on this class may be significantly lower.

Many of the products you will find in certified Toro dealers' stores come with a warranty or guarantee from The Toro Company. In addition, our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. Full details of your consumer rights may be found at www.consumerlaw.gov.au

See your certifed Toro dealers for details on all of our warranties.









